



eVOQUA
WATER TECHNOLOGIES



**AQUA
ANALYTIC**



ULTRA CLEAR™ RO

HIGH QUALITY, LOW PRICE

The Ultra Clear™ RO Series produces high quality water with very low energy consumption. The use of “low energy” membranes provide very efficient and economical operation. High quality material standards guarantee long service life. The Ultra Clear RO Series uses the newest pump technology, which runs without the traditional e-motor, and operates nearly noiseless. Due to an integrated automatic membrane rinse cycle, in many cases, the systems can operate on untreated city water. Recovery rates up to 75 % are possible with optional water softening.


Product water recovery is up to 50 %, therefore Ultra Clear RO Series also conserve water. Storage tanks help for the RO systems to provide additional water volume during times of high demand. The storage tank can also be used to supply water for other lab equipment. The storage tank allows higher volumes of water to be used for short periods that would otherwise be limited to the RO system production rate.

A storage tank basically guarantees that water is available when needed. The proper storage tank size and system configuration will be recommended based on application and water volume requirements to ensure optimum service from the equipment. Standard tanks are available in 30, 60 and 80 liter sizes. Optional tank sizes are also available up to 3.000l.

All systems display inlet and product water quality. The salt reduction rate will be shown in percentage. Most systems on the market have less than 20 % recovery rate. Automatic, user-friendly maintenance alerts notify the operator when system service is required.

Typical Applications

- Feed for laboratory ultrapure water systems
- General chemistry
- Laboratory washing machines including final rinse
- Feed for autoclaves and environmental chambers
- Buffer preparation

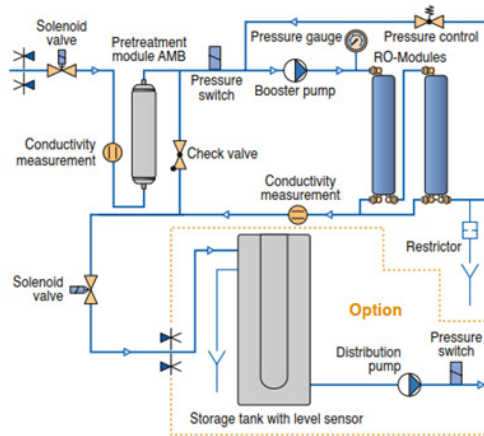

SPECIFICATIONS

System Performance		Ultra Clear RO 20	Ultra Clear RO 30	Ultra Clear RO 60	Ultra Clear RO 100
RO Production rate	l/h	20	30	60	100
Rejection rate up to	%	98	98	98	98
Rejection rate for bacteria	%	99	99	99	99
Rejection rate for particles	%	99	99	99	99
Feed Water Specifications					
Pressure	bar	2-6	2-6	2-6	2-6
Conductivity	µS/cm	< 2000	< 2000	< 2000	< 2000
Colloid Index	SDI	< 3	< 3	< 3	< 3
Free Chlorine	mg/l	<0,1	<0,1	<0,1	<0,1
Fe	mg/l	<0,1	<0,1	<0,1	<0,1
Shipping weight	kg	32	32	33	35
Power consumption	kW/h	0,2	0,2	0,2	0,2
Power supply	v/Hz	240/50-60	240/50-60	240/50-60	240/50-60
Dimension (HxWxD)	mm	530x340x420	530x340x420	530x340x420	530x340x420
Item number		W3T324330	W3T324511	W3T199978	W3T198158

* = 115V upon request

CONSUMABLES & ACCESSORIES

Item Number	Description	Change Frequency
W3T199202	Ultra Clear RO Tank 30 l	
W3T234643	Ultra Clear RO Tank 60 l with pump	
W3T231646	Ultra Clear RO Tank 80 l with pump 1 m ³ /h	
W3T197613	Pre-treatment module AMB	3-6 months*
W3T197620	RO module 10 l/h	2 - 3 years
W3T328295	RO module 20 l/h	2 - 3 years
W3T197580	RO module 60 - 100 l/h **	2 - 3 years

* = Cartridge exchange may be more frequent. Subject to feed water quality and consumption.

** = Amount of modules depends on system size



Fahrenberg 8, 22885 Barsbuettel, Germany

Tel. +49 (0)40 670 868 -60 868 -6 Fax. +49 (0)40 670 868 -44 www.evoqua.com/en/brands/lab



LLC AQUAANALYTIC
General importer of EVOQUA in Russia, EEU countries, Turkey, Israel

st. Marshal Sokolovsky, 3, office 206, Moscow, Russia, 123060. +7 495 204 23 95,
+7 495 798 99 70, info@aquanalytic.com

